

Specialty Carbon Black for Polymers

Industry Information 0403



orion ENGINEERED
CARBONS
Focused. Innovative. Responsive.

Table of Contents

1 Introduction	4
2 Why Carbon Black in Polymers?	5
3 What is Carbon Black?	6
4 Dispersion	7
5 Carbon Black Performance	8
5.1 Coloring	8
5.2 UV Stabilisation	9
5.3 Conductivity	10
5.4 Reinforcement and Rheological Control	11
6 Product Recommendations	12

1 Introduction

Orion Engineered Carbons is one of the world's leading manufacturers of Carbon Black. Following our claim "WE KNOW BLACK", our passion is dedicated to the color black in all its shades and elegant appearance. With our expertise in Carbon Black we continuously strive to push the customer product to the top of its performance.

We are the only supplier, who possesses five different production processes. Our Furnace-, Lamp-, Gas-, Acetylene- and Thermal Blacks enable us to offer our customers the broadest range of products and find the perfect match for their requirements. Thanks to our 14 plants worldwide we are globally present and able to react as fast as possible to our customers' needs. Our four technical centers focus continuously on searching for new innovations and carrying our product quality to the next level. More than 1400 employees work passionately every day to offer our customers the highest quality and the best service.

Carbon Black boosts the chemical and physical properties of batteries, coatings, paints, polymers, rubber, and many other applications. They also enhance its electrical conductivity, UV-protection and infrared absorption. We constantly stay tuned to the customers' needs to provide them with a solution that matches perfectly their requirements following our core value of collaborative partnerships for any business action.

Carbon Black is of highest importance in the polymer industry and suitable for the following applications:

- Pipes for gas, drinking and waste water
- Synthetic fibers for textiles and Industrial Applications
- Adhesives and sealants
- Semiconductive compounds for high voltage cables
- Cablejacketing
- Engineered polymers for automotive parts
- Films for food packaging and agricultural applications
- Conductivity

These are just some examples for the usage of Carbon Black in the polymer industry, should your application be missing, please do not hesitate to contact the address on the backside of the brochure.



WE KNOW BLACK.

2 Why Carbon Black in Polymers?

Carbon Black is used in polymers for various reasons. Its most important effects are recorded in its coloristic properties, UV-protection and electrical conductivity in polymers. Also, the reinforcing power and the ability to change the rheological properties of the final product are advantages of Carbon Black in elastomers and adhesive & sealants.


Due to Carbon Black's excellent UV protection, the lifetime of products exposed to environmental effects can be extended and resource consumption is effectively reduced. UV-resistant polymer pipes used for water and gas transportation have a calculated longer life span of up to 100 years.

In many ways, Carbon Black contributes to sustainable business approaches.

Conductive polymers can be coated antistatically, this makes them very suitable to replace heavy car body parts with lightweight plastic materials. Such a replacement leads to a lighter vehicle and thereby fosters the reduction of energy consumption, CO₂ emissions and production costs. Power cables benefit from very clean conductive Carbon Black. Semi conductive layers smoothen the electrical field stress, avoiding local heat overexposure which could cause a premature cable failure. An additional benefit is an increased energy transmission performance. Consequentially, a power cable's lifetime and performance are extended with Carbon Black.

Rheological and mechanical properties of adhesives and sealants are modified by Carbon Black. Flexible bonds of various materials are now possible, automotive and building constructions are optimized, weight is reduced, resources are conserved and improved processes lead to possible cost reduction. The excellent tinting strength and jetness of Carbon Black gives polymers an intense color and prevents color fading. These properties are requested in almost all industry fields, especially the automotive, electronic consumer goods and textile industry.



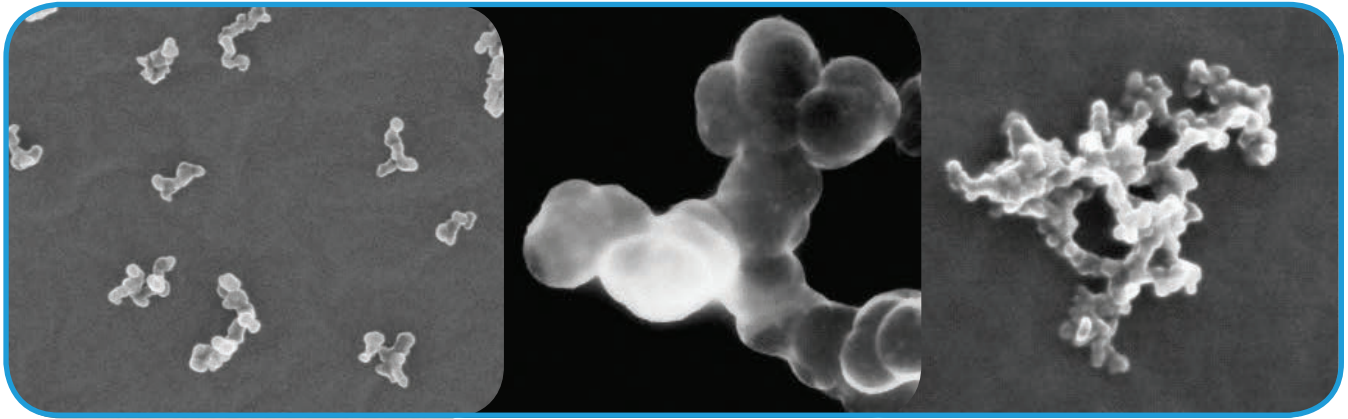

4 Dispersion of Carbon Black in Polymer

As all small particle size products, Carbon Black requires an excellent dispersion in its respective binder system to develop its fully desired and reproducible effect.

There are numerous dispersing devices, continuous and discontinuous kneaders for compounding used and available on the market today. The viscosity of the complete system and the type of polymer determine which fits best. In general, beaded Carbon Blacks are commonly used to produce masterbatch, as they have good flowability and can be continually dosed without interruption during processing.

During the direct compounding process of Carbon Black in PVC, the material usually gets pre-dispersed in heat-cool mixing combinations. As the polymer is very sensitive to shearing and only limited shear forces can be applied in the compounding process, a good pre-dispersion is important to achieve a satisfying coloring result. In this process mainly powder Carbon Black is used but also beaded Carbon Black becomes more and more popular.

For incorporating Carbon Black in liquid systems, such as color concentrates in form of pastes and adhesives, beading mills, 3 roller mills, rotor-stator systems, planetary dissolvers and horizontal mixers are used. Disc dissolvers are often used for prewetting the product but are rarely enough as solely used dispersing machine. In high viscose systems an additional stabilization of the Carbon Black dispersion is usually not necessary, while low viscose systems need to be stabilized with additional dispersing agents. Both Carbon Black powder and beads are used depending mainly on the dispersion equipment.

5 Carbon Black Performance

5.1 Coloring

Carbon Black is the most commonly used pigment to provide dashboards, films, electronic devices and many other plastic articles with intense black color. The addition of 0.3 % - 1 % is usually sufficient for achieving an opaque black color. However, higher concentrations may be required for those polymer materials possessing their own inherent color, which needs to be covered.

Technical terms, such as jetness, tinting strength and undertone are frequently used when describing the coloring of polymers with Carbon Black. The dispersibility represents an additional key factor for getting the best color performance. The parameters are briefly defined as follows:

Jetness is the intensity of the black color achieved by the Carbon Black grade. The lower the light reflection from the colored material the higher is the jetness level.

Tinting strength describes Carbon Black's ability to color other coloring components or mask them with black coloring. If a given color shade (e.g. white or colored) is darkened by adding Carbon Black it is called tinting. Tinting strength indicates how much Carbon Black loading is necessary to cover the inherent color of the component.

Carbon Blacks which have a high specific surface area and low structure have a higher tinting strength than those with lower specific surface area and higher structure. Usually those Carbon Blacks with a lower tinting strength and very good dispersion properties fits best for the use in a tinting application.

During the pigmentation of polymers, a definite undertone develops in addition to the black color. It can either be brownish or bluish depending on the applied type of Carbon Black. One must distinguish between the visual assessments of a black pigmentation in masstone when seen from above or when viewed through a transparent section or in opaque tinting applications for example grey colors.

To get the most out of Carbon Black, good dispersion is essential. This is achieved by wetting the Carbon Black surface, breaking beads and agglomerates by shear forces and distributing these fine aggregates evenly into the polymer matrix. Higher structure and coarse particles sized Carbon Black are easier to disperse than small and low structured Carbon Black.



5.2 UV Stabilization

The excellent light absorption properties of Carbon Black effectively protect Polymers, which are exposed to sunlight, from photo-oxidative degradation.

Carbon Black has several functions in regards of UV stabilization:

- It shields the polymer surface from radiation of a multitude of various wavelengths
- It converts light energy into thermal energy
- It acts as stabilizer by trapping free radicals


The influence of the Carbon Black concentration on UV stability of Polypropylene becomes visible in Figure 2. Here, the depth of damage was measured in vertical cross-sections taken from the surface exposed to radiation.

Polyolefins, in particular, are damaged by UV radiation. To protect Polyolefins a Carbon Black loading of ~2.0 - 2.5 wt% is recommended. This limited addition of Specialty Carbon Black meets the various European regulations governing the use of the material in food contact applications and does not significantly affect other polymer properties, e.g. mechanical properties.

Carbon Black with a primary particle size <25 nm and high structure are the most suitable UV stabilizers.

Figure 2

UV Protection of Polypropylene with Specialty Carbon Black (Microtome Section after 3,500 h in the Xenon Test)

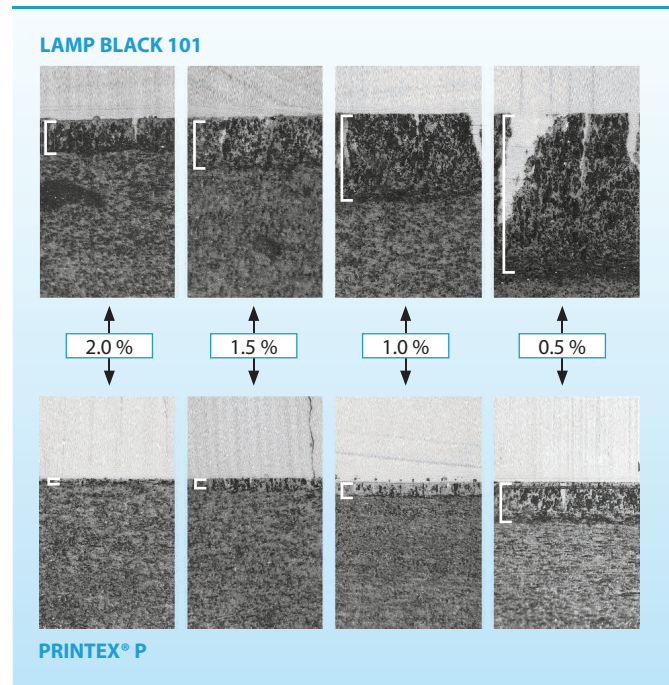

5.3 Electrical Conductivity and Insulation

Carbon Black can impart conductivity and anti-static properties to polymers. Conductive polymers are used for transport packaging of sensitive electronic components, semi conductive cable compounds for conductor shielding, in floor coverings, carpet belts and conveyor belts as well as in air conduits and blasting hoses for explosives in the mining industry, just to name a few examples.

Polymers generally possess good insulation properties. Their electrical characteristics remain unchanged at Carbon Black loadings required for pigmentation or UV protection. Once a certain concentration of conductive Carbon Black is exceeded, the electrical resistivity strongly drops by several units to the power of 10 (Percolation threshold). After percolation the resistance continues to decline more slowly at increasing Carbon Black concentration.

The required loading level of Carbon Black depends on the applied type of conductive Carbon Black, the processing method, the requirements, which must be met and the polymer system. Typical Carbon Black parameters such as structure, specific surface area, porosity define the conductivity performance. In general, a higher structured Carbon Black is more suitable for conductive applications. For the polymer system parameters like the density, rheology, crystallinity and morphology have a high impact on the loading level.

Different processing methods can lead to substantial variations in the electrical resistance of the finished products (Table 1). The reasons for this are orientation caused by different shear stress coming from the processing.

Table 1
Influence of Processing Methods on the electrical Resistance

Process	Specific Resistivity [$\Omega \cdot \text{cm}$]
Sheet Pressing	$< 10^2$
Extrusion	$10^3 - 10^6$
Injection Moulding	$10^3 - 10^{12}$
Film Blowing	$10^3 - 10^8$



Figure 3
The Influence of the Specialty Carbon Black Content on the electrical Resistivity of Polymers


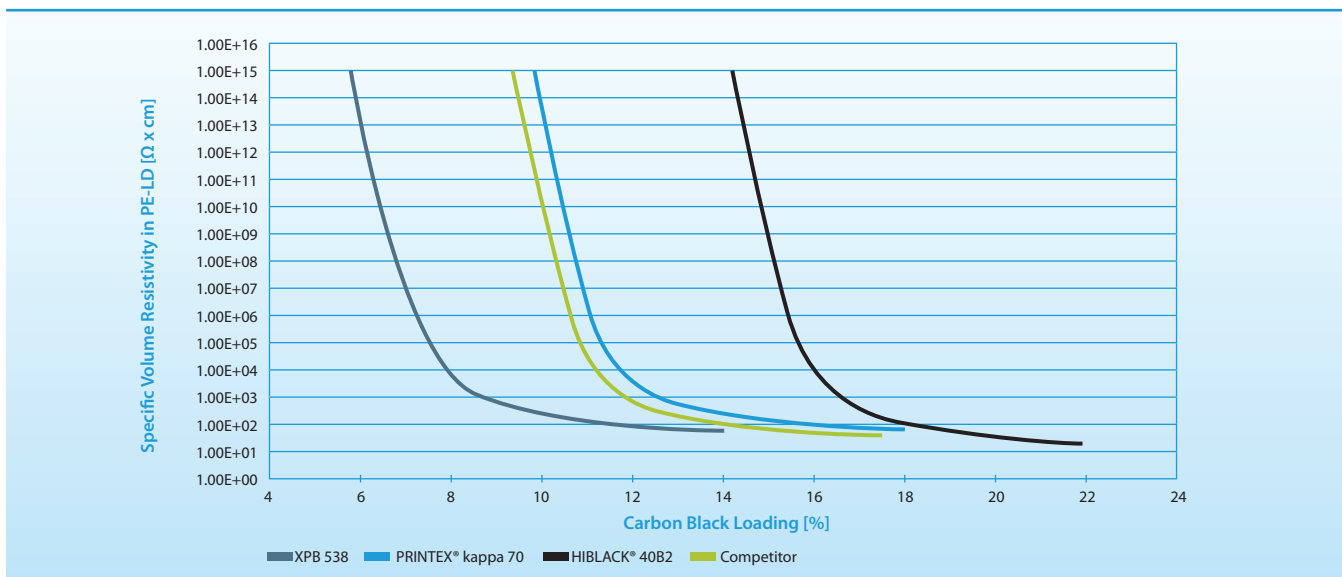


Figure 4

Product Performance at an electrical Volume Resistivity of $10^{14} \Omega \cdot \text{cm}$

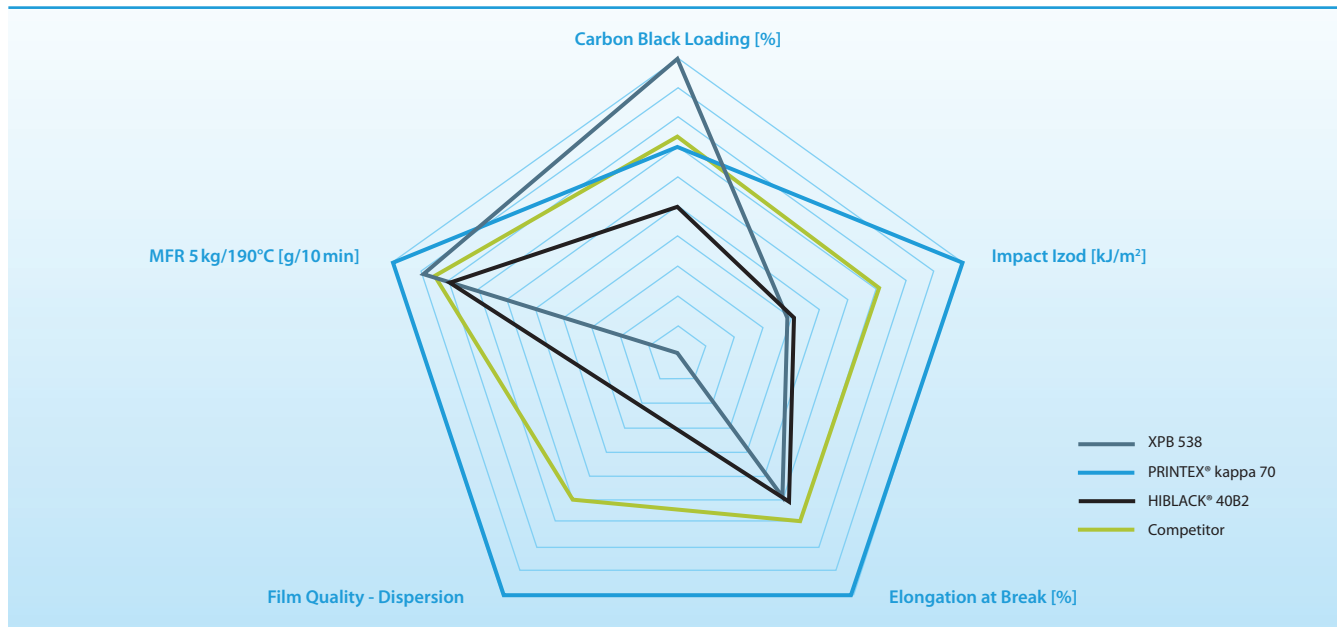

5.4 Reinforcement and rheological Control

Carbon Black are particularly used in the automotive industry in high-tech windshield polyurethane-based adhesives. It gets also applied in silicon rubber, silyl modified polymer, thermoplastic elastomers and butyl rubber. Carbon Black provide an excellent sag resistance, improve the mechanical properties and make the adhesive stable facilitating its application. With Carbon Black it is possible to formulate high end structural adhesives for the use in several industries like automotive, electronics, construction and aerospace.


The following performance parameters make Carbon Black beneficial for adhesives and sealants:

- Excellent thixotropy
- High and quick viscosity decrease at higher shear rates
- Fast and perfect viscosity recovery after strain reinforcing




Figure 5

Thixotropy Performance of Specialty Carbon Black

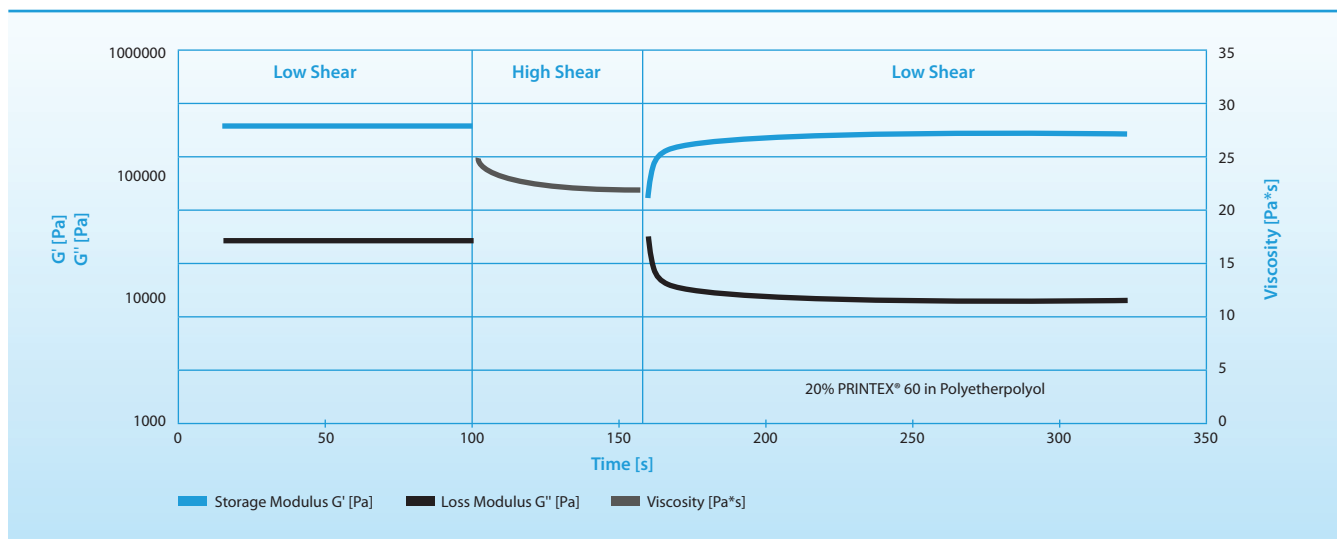


6 Product Recommendations



Adhesives & Sealants

<p>Our Product Recommendations</p> <p>PRINTEX® 60 PRINTEX® 60A</p> <p>PRINTEX® 30 Y50A SPECIAL BLACK 100</p>	<p>The Effect</p> <p>Rheological Control Electrical conductivity UV Stabilization</p> <p>Coloring Reinforcement</p>	<p>AROSPERSE® 11</p> <p>PRINTEX® 3 PRINTEX® V PRINTEX® U</p>
---	---	--



Synthetic Fibers

<p>Our Product Recommendations</p> <p>PRINTEX® alpha SQ AROSPERSE® 138 AROSPERSE® 26 PRINTEX® L6 SQ</p>	<p>The Effect</p> <p>UV Protection Coloring</p>	<p>PRINTEX® 300 AROSPERSE® 11 PRINTEX® U</p>
---	--	--




Our Product Recommendations

PRINTEX® 60A
PRINTEX® zeta A
 PRINTEX® alpha SQ
PRINTEX® alpha A
 PRINTEX® kappa 70

The Effect

Coloring
UV Stabilization
 Conductivity

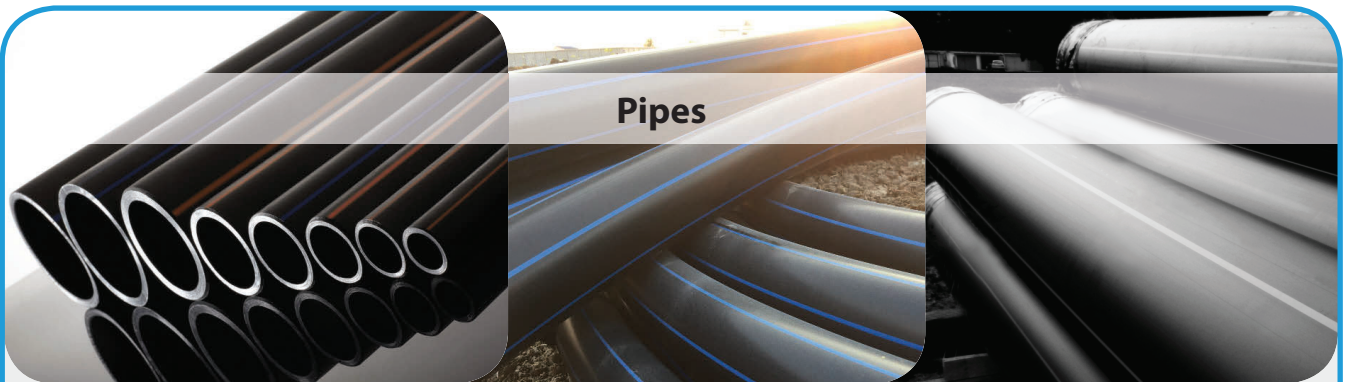

Our Product Recommendations

PRINTEX® zeta A
 PRINTEX® U PRINTEX® P
PRINTEX® alpha A
 PRINTEX® kappa 70

The Effect

UV Protection
 Electrical conductivity



Wire & Cable

Our Product Recommendations

HIBLACK® 420B

HIBLACK® 150B

PRINTEX® HV

PRINTEX® kappa 10

PRINTEX® MV

AROSPERSE® 5-183A

The Effect

Electrical conductivity

UV Stabilization



Engineered Plastics

Our Product Recommendations

SPECIAL BLACK 4

PRINTEX® 80

NEROX® 555

HIBLACK® 600LB

PRINTEX® 90

PRINTEX® 85

NEROX® 3500

HIBLACK® 890

The Effect

Coloring

UV Stabilization



The Americas

Orion Engineered Carbons LLC
1700 City Plaza Drive, Suite 300
Spring, TX 77389
USA
Phone +1 832 445 3300

AMERICAS@orioncarbons.com

Europe/ Middle East/ Africa

Orion Engineered Carbons GmbH
Hahnstraße 49
60528 Frankfurt am Main
Germany
Phone +49 69 36 50 54 100

EMEA@orioncarbons.com

Asia Pacific

Orion Engineered Carbons Trading (Shanghai) Co., Ltd.
BM Intercontinental Business Centre, Room 3701-3702
100 Yutong Road
200070 Shanghai, China
Phone +86 21 6107 0966

APAC@orioncarbons.com

Global Corporate Headquarters

Orion Engineered Carbons S.A., 6 Route de Trèves, L-2633 Senningerberg, Luxembourg, Phone +352 27 04 80 60

www.orioncarbons.com

All information and statements contained herein are believed to be accurate, however Orion Engineered Carbons GmbH (as well as all other Orion Engineered Carbons group companies including Orion Engineered Carbons SA), its agents and/or affiliates give no warranty with respect thereto, including but not limited to any results to be obtained or the non-infringement of any proprietary right. Use or application of such information or statements or the material or systems described herein is at user's sole discretion and risk, and consequently user acknowledges that Orion Engineered Carbons GmbH (as well as all other Orion Engineered Carbons group companies including Orion Engineered Carbons SA), its agents and/or affiliates shall bear no responsibility or liability for same. Nothing herein shall be construed as a license of or recommendation for use, especially with concern to the potential infringement of any proprietary right. All sales are subject to the respective Standard Terms & Conditions of Sale issued by Orion Engineered Carbons GmbH or - as the case may be - another Orion Engineered Carbons group company, including but not limited to the Limited Warranty clauses contained therein.

© 2019 Orion Engineered Carbons GmbH

OEC-II 0403-10/2019